


PT PLUS ROUND DUCT

External Use

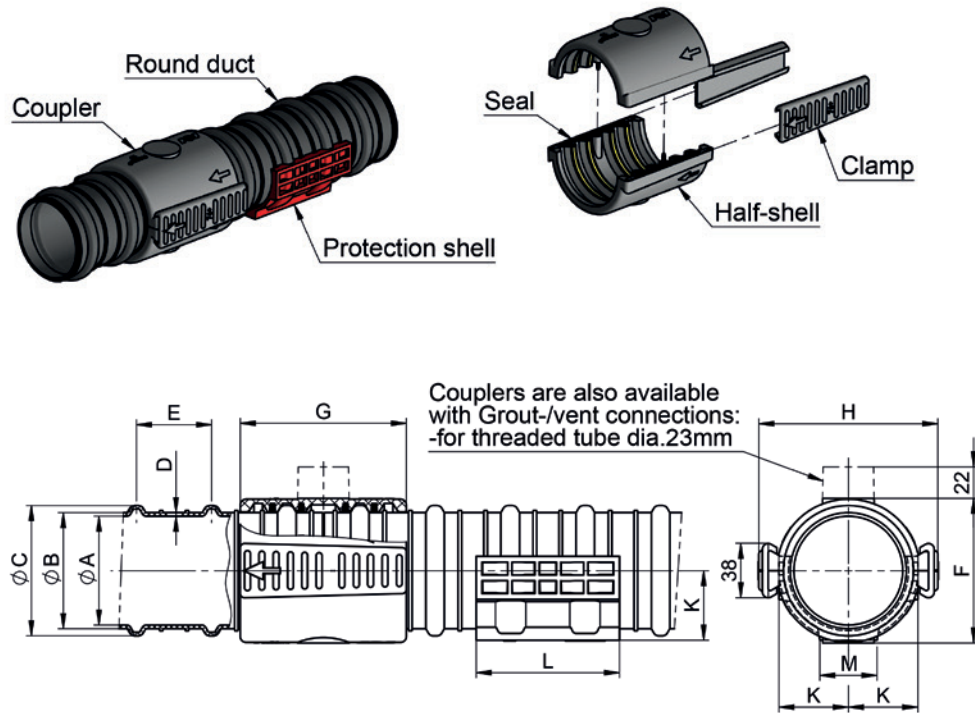

TYPE	TENDON	ROUND DUCT					COUPLER			PROTECTION SHELL		
	UNIT	ØA	ØB	ØC	D	E	F	G	H	K	L	M
	0.6"	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
22	6-1	22	25	31	1.5	55	27.5	80	-	-	-	-
59	6-7	58	63	73	2.5	42	83	108	107	39.5	82	30
65		65	70	80	2.5	52.5	90	118	114	43	92	40
76	6-12	76	81	91	2.5	52.5	101	116	125	48.5	100	40
85	6-15	85	91	101	3	52.5	109	118	133	53.5	100	50
100	6-19/22	100	106	116	3.0	60	124	126	148	61	119	50
115	6-27	115	121	131	3.0	60	139	127	163	68.5	119	60
130	6-31/37	129	136	146	3.5	52.5	154	134	179	76	110	65
150	6-43/55	150	157	167	3.5	60	176	126	200	86.5	118	70

For long tendons, strong deviations and in segmental constructions, the next larger duct may be considered.